




# **Omni Mobile 25,600 PRO**

## **Quick Start Guide**

## ***POWER YOUR NEXT ADVENTURE***

For more information visit our ***support*** page at [www.omnicharge.co](http://www.omnicharge.co)

# PORTS

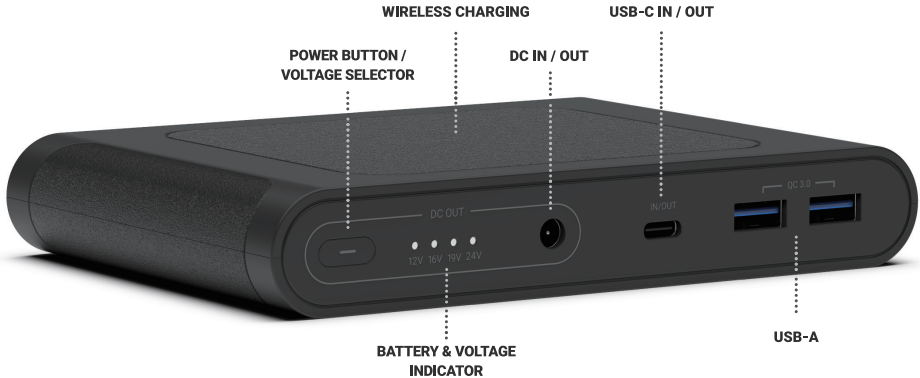

---

## BUTTON COMBINATIONS

### Long Press: On/Off

Long Press the power button to power on/off the Omnicharge.

### Double Press: DC Output

Double press the power button while powered on to enter DC output mode, then single press the power button to select your desired voltage.

### Press Four Times: Auto shut off On/Off

Rapidly press the power button four times to enable/disable auto shut off.

# DC PORT

Output: 12V/16V/19V/24V up to 3.5A (72W Max)  
Input: 45W (5V-30V up to 2A)

With the four most commonly used DC voltages you can directly charge your laptop without needing your laptop charger.



12V/16V/19V/24V

To enter DC output mode, double press the power button, then single press to select your desired voltage preset.

**Warning:** Before using DC Output find the correct voltage for your laptop from its power adapter. **Using the wrong voltage can damage your device.**

*You can purchase additional DC cables from our website. For more information about available accessories, please visit [www.omnicharge.co](http://www.omnicharge.co).*

Power your laptop



DELL



MacBook



Surface Pro




Lenovo

## **USB-C PORT**

PD 60W Output & 40W Input

---

Our PD enabled USB-C port can provide up to 60W output and 40W input.

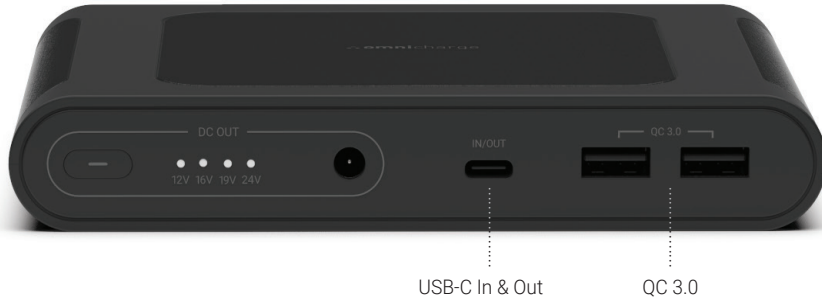

**Note:** If your USB-C output does not start charging, try to reconnect the USB-C cable.

**Note:** If the Omnicharge does not detect incoming power, try to plug in your USB-C charger while the Omnicharge is turned off. Once charging has started, you can power on the Omnicharge to utilize pass-through charging.

---

## **RAPID-CHARGING USB-A PORTS**

USB-A Output: QC3.0 (18W)

Both ports are compatible with QC 3.0 devices and can output up to 18W.

# WIRELESS CHARGING

10W Output

Recharge your phone with our wireless charging feature. Simply place your phone on top of the Omnicharge to get fast and reliable wireless charging.



**Note:** Place your phone horizontally towards the back of the Omnicharge like shown on the picture to the left.

## THE OMNICHARGE MAY BE RECHARGED IN A VARIETY OF WAYS

DC Input 4.5V-36V, Up to 3A (2W - 45W)

USB-C Input: 40W

Charging from the Wall

Use the included USB charging cable to recharge your Omnicharge. A fast charger is included on certain models and can also be purchased separately.

*Note: Make sure the output voltage of your charger falls within 4.5V - 36V range. Omnicharge only accepts 5.5 x 2.1mm barrel plugs.*



AC wall charger  
3 hours



USB sources  
5-7 hours



Solar (up to 45W)  
3-6 hours



Car power port (12V)  
3 hours



Laptop adapter  
3 hours

## **CUSTOMER SUPPORT**

All Omnicharge products have gone through quality inspection. If you find your Omnicharge or any Omnicharge accessory is experiencing or demonstrating any abnormal behavior, immediately stop all product use and contact us at **[support@omnicharge.co](mailto:support@omnicharge.co)**.

---

## **FOLLOW US**



<https://www.facebook.com/omnicharge>



<https://www.instagram.com/omnicharge>



<https://www.youtube.com/c/omnicharge>



[https://twitter.com/omni\\_charge](https://twitter.com/omni_charge)

---

# **THANK YOU**

[www.omnicharge.co](http://www.omnicharge.co)